DC-CT® C1040-M34
Industrial Smart 1000 A Current Transducer

The C1040-M34 is an industrial, galvanically isolated, precision, closed-loop Smart current transducer based on ISOTEL's DC-CT® proprietary technology and the patented Platiše Flux Sensor (PFS). It integrates IEEE 1451.4 TEDS for plug-and-play self-identification and self-description, ISOTEL I-Wire diagnostic interface, and a fail-safe range/fault signal bringing smart sensor capability to industrial current measurement.

It features standard Molex 3 and 4-pin interfaces, a 40 mm bus bar opening that accepts a 38 mm round conductor, and delivers a bandwidth of 250 kHz with a total error below 500 ppm FS over the entire temperature range. Standby power consumption is 0.75 W. The transducer operates from a bipolar ± 12 to ± 24 V supply and provides an analogue current output.

Key Specifications

- Sensitivity Accuracy <250 ppm over T_a
- Total Offset <250 mA over T_a
- Bus bar opening 40 mm and 38 mm round
- Bandwidth 250 kHz
- Low Noise $1\ \mathrm{mA_{rms}}$ @ $BW = 10$ kHz and $10\ \mathrm{mA_{rms}}$ @ $BW = 250$ kHz
- I-Wire TEDS and diagnostic interface IEEE 1451.4 compliant
- Fail-safe range/fault signal
- Operates from Bipolar ±12 . . . ±24 V Supply
- Standby power consumption 0.75 W
- Typical power consumption 7.5 W at rated I_P
- High Pulse/Overload Capacity 100 kA, 1 s
- Withstands rated current and surge currents without damage when unpowered
- Operating temperature range -40 to 85 °C

Applications

- Power quality, harmonic analysis, and energy metering
- Data center power monitoring: PUE optimization and AI/GPU load transient capture
- Substations and industrial distribution: precise AC/DC current sensing
- Variable-speed drives, servo drives, inverters, UPS, and BMS
- Predictive maintenance / MCSA: low-noise current spectrograms for fault detection
- EV charging, battery storage (BESS), wind turbines, and railway converters

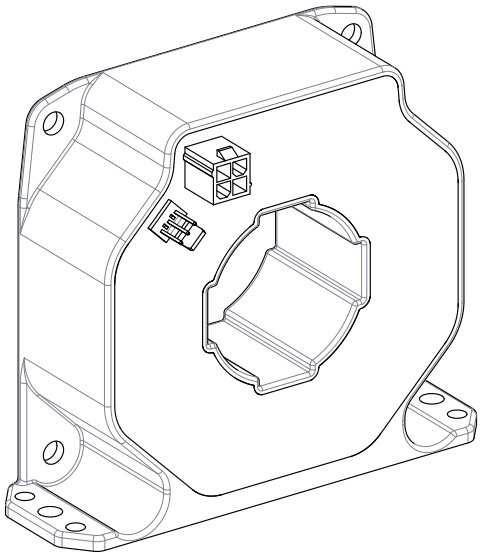

© ISOTELpower Ltd., Slovenia, www.dc-ct.com
PRELIMINARY RELEASE

1 Electrical Characteristics

Description	Symbol	Min -5σ	Typ μ	Max 5σ	Unit	Fig
Absolute Maximum Ratings						
Power Supply Voltage				± 27	V	
Power Supply Inrush Current				TBD	mA	
Primary Steady Current DC	I_{Pmax}	-1000	..	$+1000$	A	
Max Pulsed Primary Overload Current, 1 s	I_{ov}			100	kA	
Max Pulsed Secondary Overload Current	I_{SOV}			20	A	
Max Primary Conductor Temperature				100	°C	
DC Accuracy						
Rated/Nominal Measuring Current DC	I_P	-1000	..	$+1000$	A	
Peak Measuring Range DC @ $T_a = 23$ °C	I_{PM}	-1500	..	$+1500$	A	
Nominal Secondary Current at I_P	I_S	-200	..	$+200$	mA	
Measuring Resistance at I_{Pmax}	R_M	0	10	70	Ω	14
Transformer Ratio	N		5000		turns	
Sensitivity	S		0.2		mA/A	
Sensitivity Error including Off-Centre over T_a	ϵ_S		150	250	ppm	2
Magnetic Offset with Hysteresis over T_a RTI	I_{OM}		± 100	± 200	mA	1 . . . 4
Electrical Offset over T_a RTI	I_O		± 10	± 50	mA	1 . . . 4
AC Accuracy						
Gain Accuracy @ 50/60 Hz, $I_P = 35$ A_{RMS}			TBD		ppm	
... $I_P = 710$ A_{RMS}			150	250	ppm	5
Frequency Bandwidth @ -3 dB, $I_P = 0.7$ A_{RMS}	f_{-3dB}		250		kHz	7
AC Flatness < 10 kHz			< 0.1		dB	7
... < 100 kHz			< 3		dB	
Phase Shift < 10 kHz			$< 2°$		deg	8
... < 100 kHz			$< 5°$		deg	
Reaction Time at 10% of the final I_{Pmax}			56		ns	6
Reaction Time at 90% of the final I_{Pmax}			157		ns	6
Typical RMS Noise at 10 kHz BW RTI		0.6	≈ 1		mA	9, 10
... 250 kHz BW RTI			≈ 10		mA	
Platiše Flux Sensor Amplitude RTI @ $f_{PFS} = 220$ kHz	A_{PFS}		< 10		mA	
Immunity						
Common Mode Sensitivity @ 100 kHz RTI			1.4		mA/V	
External Magnetic Immunity @ 5 mT in any direction RTI	I_{XB}		TBD	TBD	mA	
I-Wire and Signal Integrity						
Fast Out-of-Range & Fault Detection to Status Asserted			300		μs	
I-Wire Max Current			10	25	mA	
I-Wire Max Voltage referred to 0 V		-30		30	V	

© ISOTELpower Ltd., Slovenia, www.dc-ct.com
PRELIMINARY RELEASE

Description	Symbol	Min -5σ	Typ μ	Max 5σ	Unit	Fig
Power Supply						
Power Supply Voltage		± 12	± 15	± 24	V	
Power Supply Maximum Inrush/Working Current @ ± 24 V				< 0.5	A	
Current Consumption			$25 + I_p/5$		mA	
Environmental Conditions						
Isolation CAT II / CAT III non-insulated primary conductor			1000		V	
Isolation CAT II / CAT III insulated primary conductor			1000 / 1500		V	
Dielectric Withstand Voltage (Primary to Secondary), 1 min			3.5		kV	
Clearance / Creepage			20		mm	
Weight	m		0.5		kg	
Storage and Operating Temperature Range	T_A	-40		$+85$	°C	

Abbreviations

BW Bandwidth

DC-CT® Brand that uses the PFS for a magnetic flux sensor

FS Full-Scale

PFS Platiše Flux Sensor

RTI Referred to Input

TEDS IEEE 1451.4 Transducer Electronic Data Sheet

© ISOTELpower Ltd., Slovenia, www.dc-ct.com
PRELIMINARY RELEASE

1.1 Accuracy

The total sensor error E is characterised by the linear sum of error components referred to the input (RTI):

$$E = \epsilon_S \cdot I_P + I_{OM} + I_O$$

For worst-case error budgeting, the maximum total error E_{max} is obtained by summing the maximum values from the Electrical Characteristics table:

$$E_{max} = \epsilon_{S,max} \cdot I_P + I_{OM,max} + I_{O,max}$$

1.1.1 DC Sensitivity and Total Offset including Hysteresis

The following typical characteristics were obtained at a nominal power supply of $\pm$15 V, a measurement resistor R_M of 2.5 Ω, an ambient temperature T_A of 23 $\pm$5 °C unless specified, and a primary conductor consisting of a 35 mm diameter round bar in the central position.

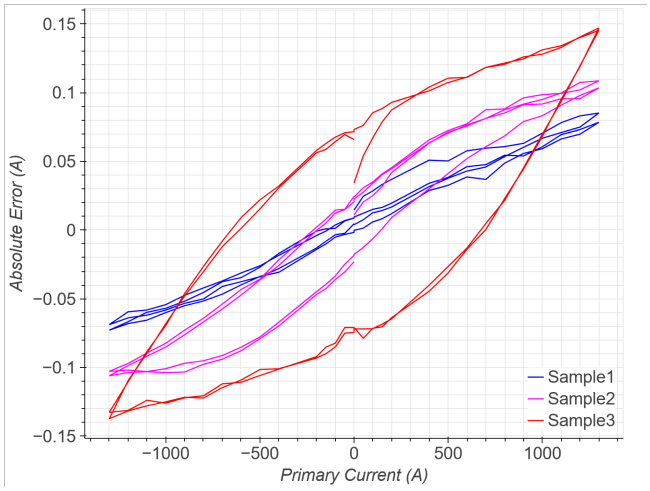

Figure 1: Typical Accuracy Conductor Centred

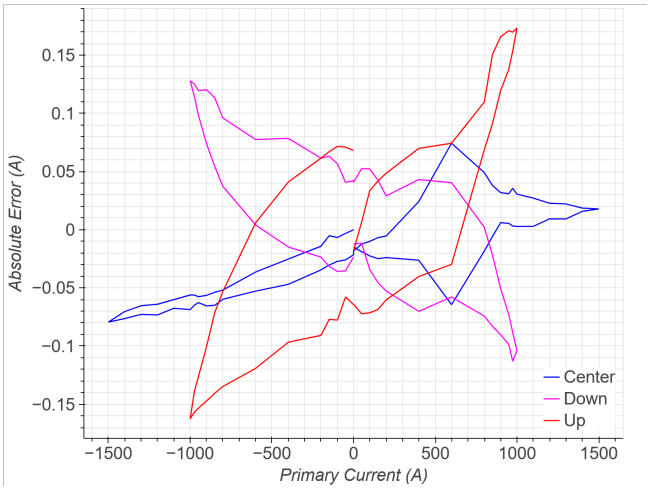

Figure 2: Typical Accuracy Conductor Off-Centred

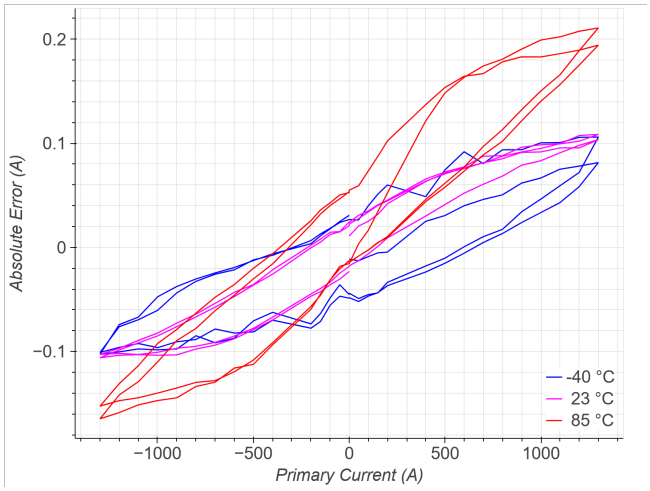

Figure 3: Typical Accuracy over T_a

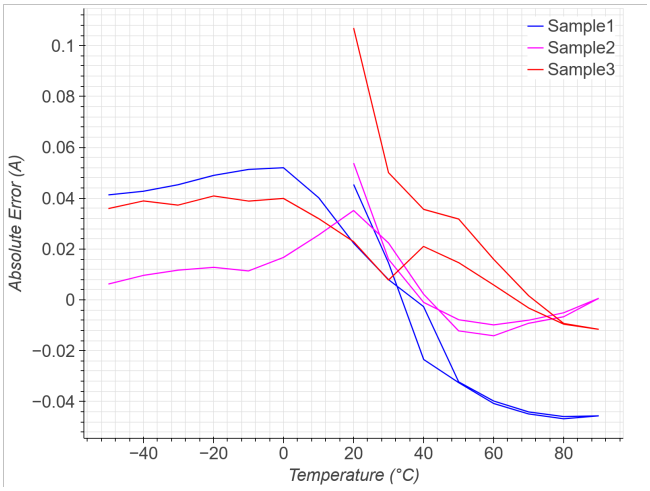

Figure 4: Typical Drift at I_P=500 A over T_a

© ISOTELpower Ltd., Slovenia, www.dc-ct.com
PRELIMINARY RELEASE

1.1.2 AC Sensitivity Accuracy and Reaction Time

Figures 5 shows the AC sensitivity error up to 150 Hz. Figure 6 shows a pulse test measurement from which filtered signal reaction times at 10% and 90% were measured.

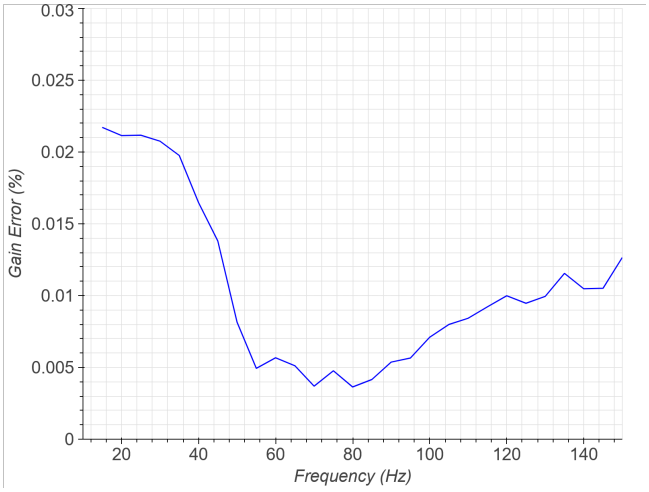

Figure 5: Large Signal AC Sensitivity Gain Error at $I_P = 700$ A_{RMS}

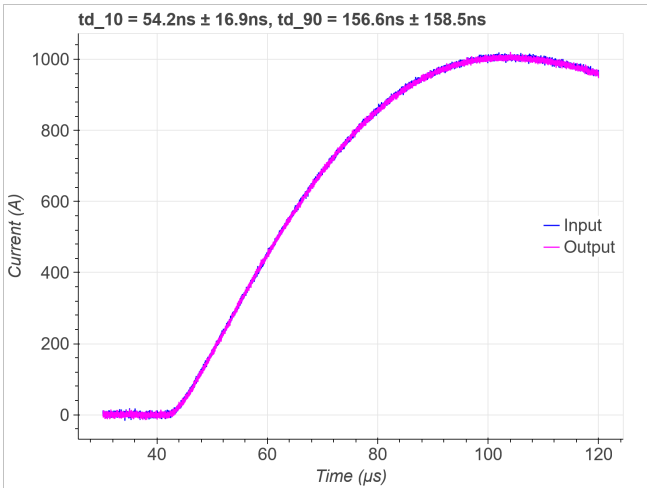

Figure 6: Pulse Test RTI, Reaction Time, $dI/dt = 20$ A$/\mu$s

1.1.3 AC Frequency Response

Figures 7 and 8 depict the typical small-signal response at 0.7 A_{RMS}.

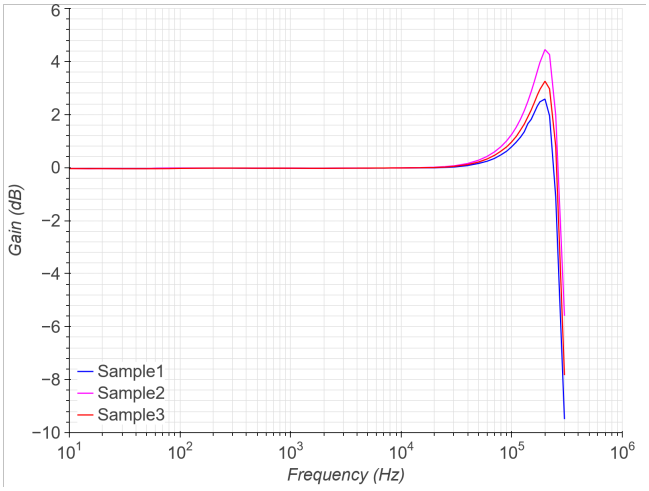

Figure 7: Small Signal AC Gain Response at $I_P \approx 0.7$ A_{RMS}

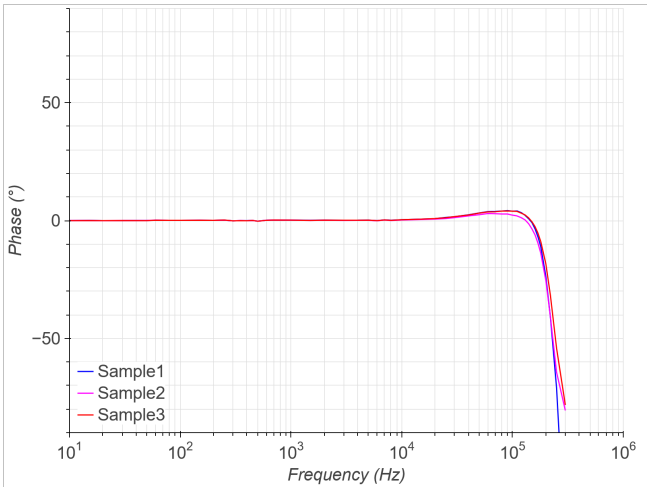

Figure 8: Small Signal AC Phase Response at $I_P \approx 0.7$ A_{RMS}

The C1040 provides 1.4 mA/V RTI common-mode sensitivity at 100 kHz, approximately 10 dB better than conventional closed-loop Hall transducers. This improves measurement accuracy in high-dV/dt environments such as variable-speed drives, UPS systems, and data center busways.

© ISOTELpower Ltd., Slovenia, www.dc-ct.com
PRELIMINARY RELEASE

1.2 Noise

The best noise performance is obtained with a lower-value measuring burden resistor. The following charts represent typical noise performance at 2.5 and 100 Ω, and $I_P = 0$ A. As noise represents an important feature for predictive maintenance and spectrography, a typical legacy noise performance from a closed-loop Hall sensor competitor is provided alongside.

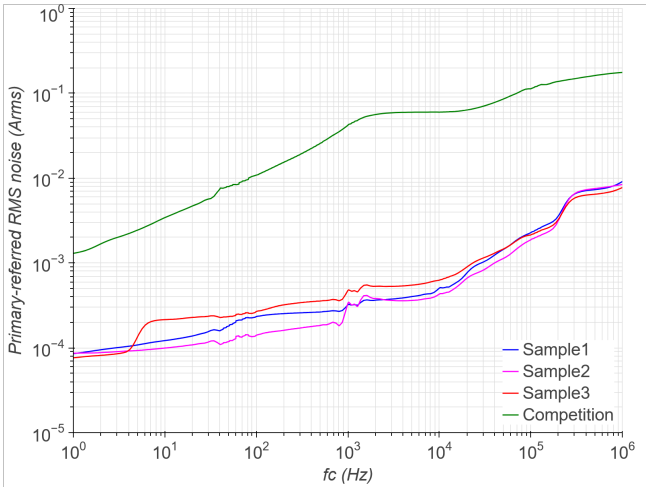

Figure 9: RMS Noise RTI at burden $R_b = 2.5\ \Omega$

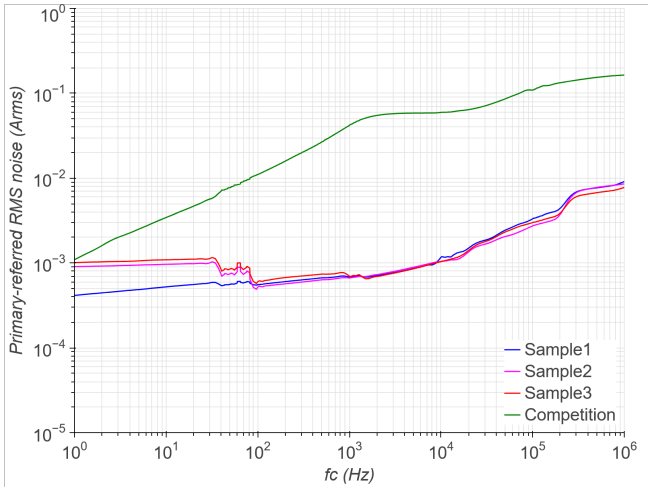

Figure 10: RMS Noise RTI at burden $R_b = 100\ \Omega$

1.3 Time Stability

Measured at an ambient temperature T_A of 23 ±5 °C; the measurement includes a start-up warm-up drift.

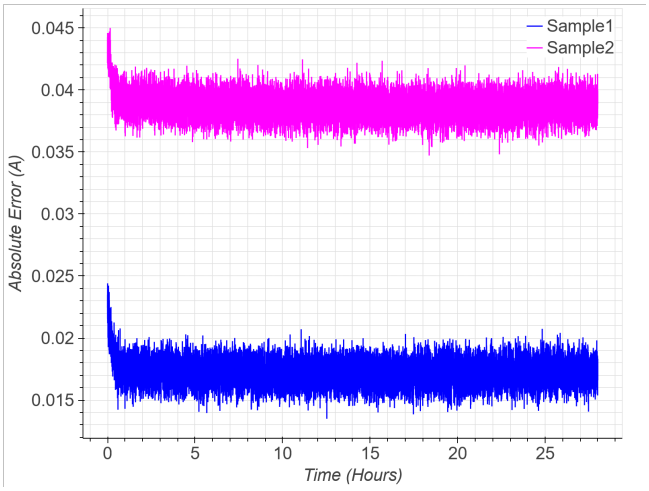

Figure 11: Time Stability at 0 A

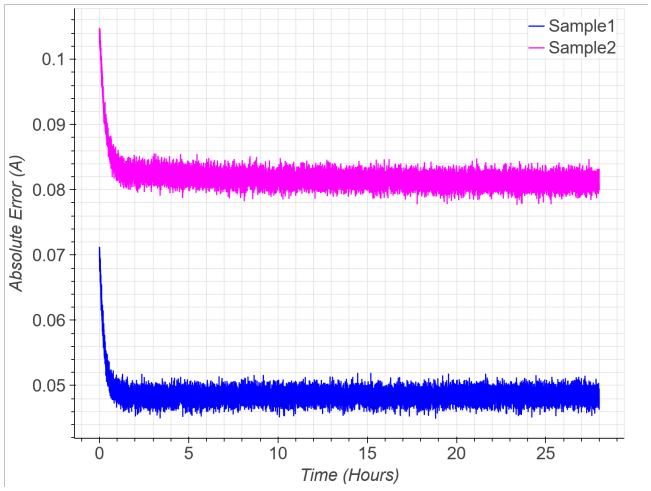

Figure 12: Time Stability at 500 A

© ISOTELpower Ltd., Slovenia, www.dc-ct.com
PRELIMINARY RELEASE

2 Connection and Operation of the Transducer

Figure 13 presents a block and wiring diagram of the C1040 for the 3-pin Molex 6410 and 4-pin Molex 5566 connectors. The 4-pin connector additionally provides ISOTEL I-Wire diagnostic interface, featuring:

- TEDS: IEEE 1451.4 Transducer Electronic Data Sheet compliant digital ID for self-identification and transducer description for plug-and-play configuration
- Temperature Sensor
- Primary Tracking Loss, Temperature Range, Voltage Supply Range, and Current Fault Signals
- Fast Out of Range Error

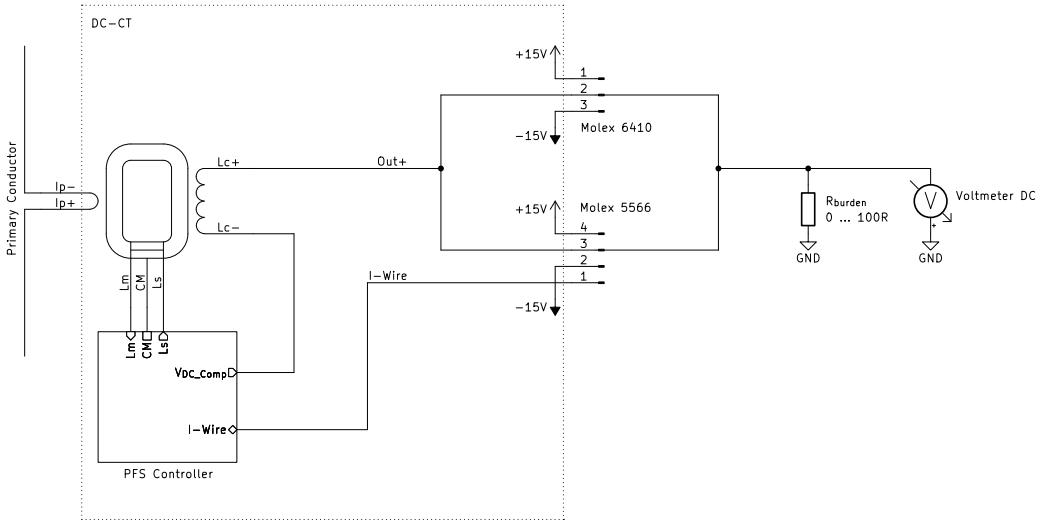

Figure 13: Block and Wiring Diagram

A bipolar ± 12 to ± 24 V supply is required to power the unit. At the same time, the sensor output represents the return ground, on which path a measurement resistor is to be inserted, whose value determines the measuring range as shown in Figure 14.

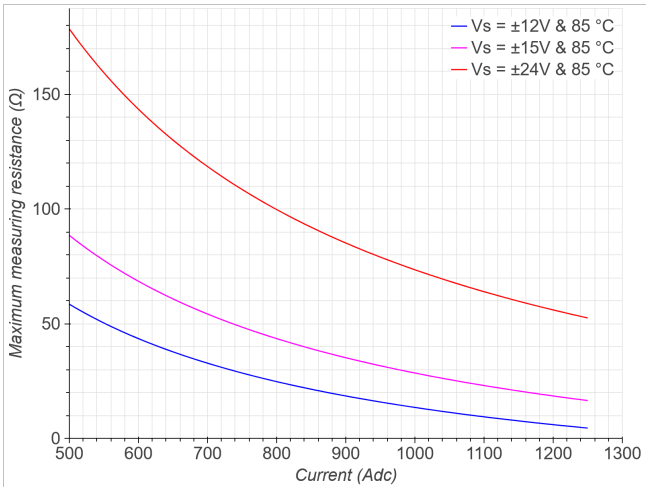

Figure 14: Max Measuring Resistance

© ISOTELpower Ltd., Slovenia, www.dc-ct.com
PRELIMINARY RELEASE

3 About the Patented Platiše Flux Sensor and the DC-CT®

The DC-CT® transducers utilise a novel Platiše Flux Sensor (PFS) technology, marketed under the PFS brand.

The PFS is implemented on a single magnetic core, similar to Hall-effect or single-chip GMR sensors, but critically, without an air-gap. This unique architecture allows it to match or exceed the performance of traditional, bulky multi-core flux-gate sensors. By eliminating complex multi-core constructions, the DC-CT® delivers laboratory-grade accuracy in a highly compact industrial form factor. Consequently, the Platiše Flux Sensor provides a definitive solution for demanding applications requiring accuracies from 0.01% to 0.1%.

Uroš Platiše invented this patented measurement principle and its foundational mechanism, Current Controlled Variable Reluctance. This mechanism actively redirects magnetic flux, efficiently converting constant (DC) flux into a measurable AC signal at a rate defined by the PFS frequency. Crucially, the PFS is inherently temperature-stable. Any minor variations are dictated mostly by the base magnetic material, meaning the sensor's performance inherently improves alongside advancements in metallurgy.

To achieve ultimate precision, the C1040 employs a zero-flux (null) method, actively compensating for magnetic non-linearities like advanced closed-loop transducers, but with superior bandwidth. The operational principle is illustrated in the following figure:

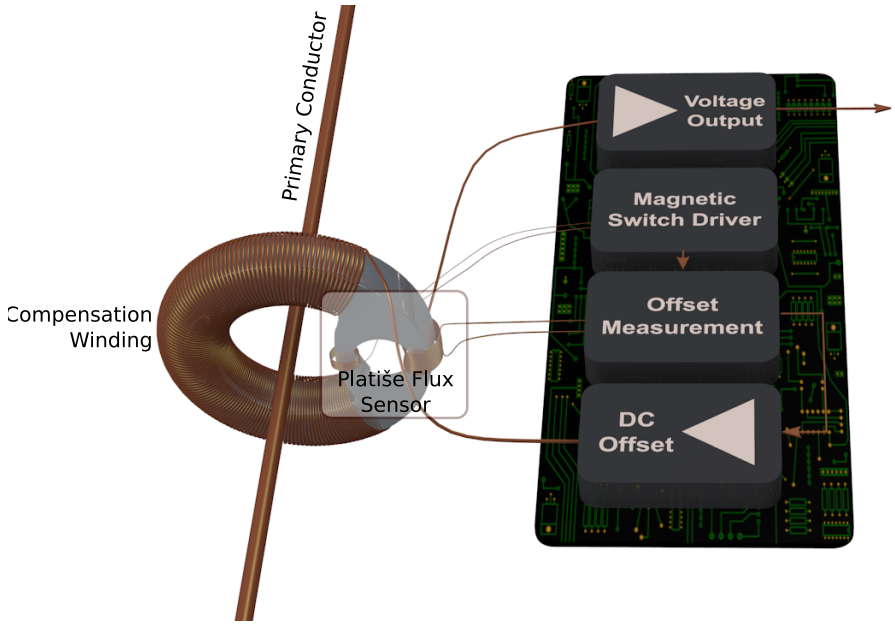

The primary current flows through a magnetic core wound with a secondary compensating winding of N turns, establishing the transformation ratio. A modulating winding, driven by a magnetic switch, and a sensing winding are applied to a localized section of the core. The offset measurement circuitry detects residual flux, which the output amplifier integrates to nullify the DC component. Meanwhile, the AC component bypasses this compensation loop, passing directly to the output to preserve wide bandwidth and rapid reaction times.

More information about this patented technology can be found at www.dc-ct.com.

© ISOTELpower Ltd., Slovenia, www.dc-ct.com
PRELIMINARY RELEASE

4 Dimensions

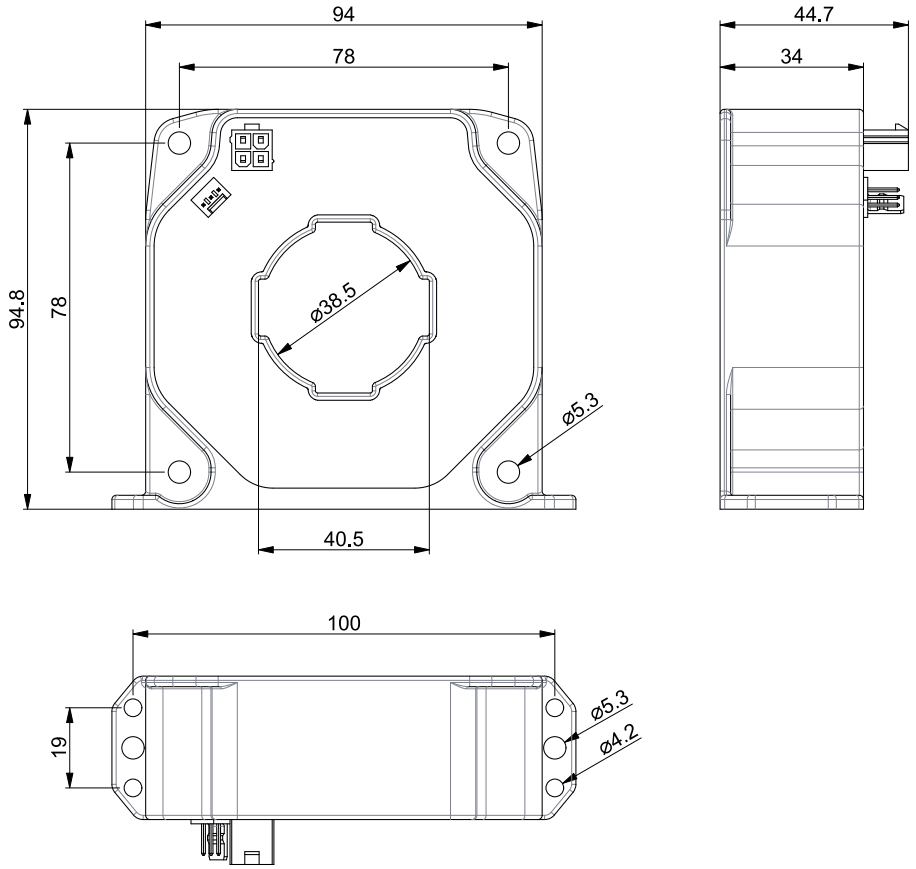

5 Ordering Information

Ordering Code	Description
DC-CT-C1040-M34	Molex 6410 (3-pin) and 5566 (4-pin) connectors

Disclaimer

DC-CT® and DC-CT® are registered trademarks of ISOTELpower Ltd, Slovenia. The information contained herein is the copyright of ISOTELpower Ltd, Slovenia, hereafter referred to only as ISOTEL. ISOTEL makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to product descriptions at any time without notice. ISOTEL does not make any commitment to update the information contained herein unless specifically provided otherwise.